


Technical Data

OPEN COUNTRY® A/T III

	SIZE	LOAD RANGE	LI/SR	CODE	UTQG /PLY	1/32"	OD	OW	SLR	RPK	RIM WIDTHS		
15	P215/75R15		100T	OWL	356060	600A B	13	27.7	8.5	12.4	467	6.0	5.5-7.0
	P225/75R15		102T	BL	356070	600A B	13	28.3	8.8	12.7	456	6.0	6.0-7.5
	P235/75R15		108T	OWL	356080	600A B	13	28.9	9.3	12.9	447	6.5	6.0-8.0
	P265/75R15		112S	OWL	355280	600A B	13	30.7	10.5	13.6	421	7.5	7.0-9.0
	LT235/75R15		104/101S	OWL	355610	6-C	16	29.1	9.3	13.0	444	6.5	6.0-8.0
	30x9.50R15LT		104S	OWL	356050	6-C	16	29.8	9.4	13.3	434	7.5	6.0-8.0
	31x10.50R15LT		109S	OWL	355910	6-C	16	30.7	10.6	13.7	420	8.5	7.0-9.0
	P225/75R16		104S	BL	355260	600A B	13	29.3	8.8	13.2	441	6.0	6.0-7.5
	245/75R16		111T	BL	356130	600A B	13	30.5	9.8	13.7	424	7.0	6.5-8.0
	245/75R16		111T	OWL	356140	600A B	13	30.5	9.8	13.7	424	7.0	6.5-8.0
	265/75R16		116T	BL	356180	600A B	13	31.7	10.5	14.1	408	7.5	7.0-9.0
	265/75R16		116T	OWL	356190	600A B	13	31.7	10.5	14.1	408	7.5	7.0-9.0
	215/70R16		100T	BL	356090	600A B	13	27.9	8.7	12.6	463	6.5	5.5-7.0
	225/70R16		103T	OWL	356100	600A B	13	28.4	9.0	12.8	454	6.5	6.0-7.5
	235/70R16		106T	BL	356110	600A B	13	29.0	9.4	13.1	446	7.0	6.0-8.0
16	235/70R16		106T	OWL	356120	600A B	13	29.0	9.4	13.1	446	7.0	6.0-8.0
	P245/70R16		106S	BL	355220	600A B	13	29.5	9.8	13.3	437	7.0	6.5-8.0
	P245/70R16		106S	OWL	355210	600A B	13	29.5	9.8	13.3	437	7.0	6.5-8.0
	255/70R16		115T	BL	356160	600A B	13	30.1	10.2	13.5	429	7.5	6.5-8.5
	255/70R16	XL	115T	OWL	356170	600A B	13	30.1	10.2	13.5	429	7.5	6.5-8.5
	P265/70R16		111T	BL	355240	600A B	13	30.6	10.7	13.7	421	8.0	7.0-9.0
	P265/70R16		111T	OWL	355230	600A B	13	30.6	10.7	13.7	421	8.0	7.0-9.0
	215/65R16	XL	102T	BL	356380	600A B	13	27.0	8.7	12.3	478	6.5	6.0-7.5
	255/65R16		109T	BL	356150	600A B	13	29.1	10.2	13.1	444	7.5	7.0-9.0
	LT215/85R16		115/112Q	BL	355760	10-E	16	30.4	8.5	13.6	424	6.0	5.5-7.0
	LT235/85R16		120/116R	BL	355770	10-E	16	31.7	9.3	14.1	407	6.5	6.0-7.5
	LT225/75R16		115/112Q	BL	355600	10-E	16	29.3	8.8	13.2	441	6.0	6.0-7.5
	LT245/75R16		120/116S	BL	355620	10-E	16	30.5	9.8	13.7	424	7.0	6.5-8.0
	LT245/75R16		120/116S	OWL	355630	10-E	16	30.7	9.8	13.7	420	7.0	6.5-8.0
	LT265/75R16		123/120R	BL	355650	10-E	16	31.7	10.5	14.1	408	7.5	7.0-9.0
17	LT265/75R16		123/120R	OWL	355660	10-E	16	31.9	10.5	14.2	405	7.5	7.0-9.0
	LT285/75R16		126/123R	BL	355680	10-E	17	32.8	11.3	14.6	393	8.0	7.5-9.5
	LT285/75R16		126/123R	OWL	355670	10-E	17	33.1	11.3	14.6	390	8.0	7.5-9.5
	LT295/75R16		128/125R	BL	355720	10-E	17	33.4	11.6	14.8	387	8.0	7.5-10.0
	LT315/75R16		127/124R	BL	355730	10-E	17	34.6	12.3	15.2	373	8.5	8.0-10.5
	LT305/70R16		124/121R	BL	355570	10-E	17	32.8	12.2	14.6	393	9.0	8.0-10.0
	P235/75R17		108S	BL	355270	600A B	13	30.9	9.3	13.9	418	6.5	6.0-8.0
	245/70R17		110T	BL	356230	600A B	13	30.6	9.8	13.8	423	7.0	6.5-8.0
	255/70R17		112T	BL	356240	600A B	13	31.1	10.2	14.0	415	7.5	6.5-8.5
	265/70R17		115T	BL	356260	600A B	13	31.7	10.7	14.2	408	8.0	7.0-9.0
	265/70R17		115T	OWL	356270	600A B	13	31.7	10.7	14.2	408	8.0	7.0-9.0
	P285/70R17		117T	BL	355250	600A B	14	32.8	11.5	14.6	394	8.5	7.5-9.5
	215/65R17	XL	103T	BL	355890	600A B	13	28.0	8.7	12.8	460	6.5	6.0-7.5
	225/65R17	XL	102T	BL	356400	600A B	13	28.5	9.0	13.0	453	6.5	6.0-8.0
	235/65R17	XL	108H	BL	356200	600A A	13	29.1	9.4	13.2	444	7.0	6.5-8.5
245/65R17	XL	111T	BL	356210	600A B	13	29.5	9.8	13.4	437	7.0	7.0-8.5	
245/65R17	XL	111T	OWL	356220	600A B	13	29.5	9.8	13.4	437	7.0	7.0-8.5	
265/65R17	XL	116T	BL	356250	600A B	13	30.6	10.7	13.8	423	8.0	7.5-9.5	
225/60R17	XL	103T	BL	356390	600A B	13	27.6	9.0	12.6	467	6.5	6.0-8.0	
LT235/80R17		120/117R	BL	355740	10-E	16	31.8	9.3	14.3	406	6.5	6.0-8.0	
LT255/80R17		121/118R	BL	355750	10-E	16	33.1	10.0	14.8	390	7.0	6.5-8.5	
LT245/75R17		121/118S	BL	355640	10-E	16	31.5	9.8	14.1	410	7.0	6.5-8.0	
LT285/75R17		117/114Q	BL	355690	6-C	17	33.9	11.3	15.1	382	8.0	7.5-9.5	
LT285/75R17		121/118S	BL	355700	10-E	17	33.9	11.3	15.1	382	8.0	7.5-9.5	
LT245/70R17		119/116R	BL	355470	10-E	16	30.6	9.8	13.8	423	7.0	6.5-8.0	
LT265/70R17		121/118S	BL	355480	10-E	16	31.7	10.7	14.2	408	8.0	7.0-9.0	
LT265/70R17		121/118S	OWL	355490	10-E	16	31.7	10.7	14.2	408	8.0	7.0-9.0	
LT285/70R17		116/113Q	BL	355530	6-C	17	32.8	11.5	14.6	394	8.5	7.5-9.5	
LT285/70R17		121/118S	BL	355550	10-E	17	32.8	11.5	14.6	394	8.5	7.5-9.5	
LT285/70R17		121/118S	OWL	355540	10-E	17	33.0	11.5	14.7	391	8.5	7.5-9.5	
LT305/70R17		121/118R	BL	355580	10-E	17	33.9	12.2	15.1	382	9.0	8.0-10.0	
LT315/70R17		113/110S	BL	355590	6-C	17	34.4	12.7	15.3	375	9.5	8.0-10.5	

XL - Extra Load

Tire data subject to change. Visit toyotires.ca for current data.

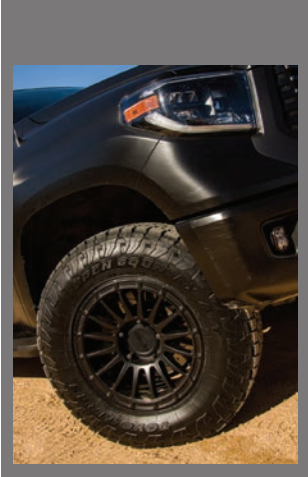

"Millennium" warranty:
- 105,000 km warranty on P-metric Eurometric sizes.
- 80,000 km warranty on LT and Flotation sizes.
- 5 year workmanship and materials.

Technical Data

	SIZE	LOAD RANGE	LI/SR	CODE	PATTERN		1/32"	OD	OW	SLR	RPK	RIM WIDTHS			
17	35x11.50R17LT		118Q	BL	355920	6-C		17	34.5	11.4	15.4	374	9.0	7.5-10.	
	35x12.50R17LT		121R	BL	355960	10-E		17	34.5	12.5	15.4	374	10.0	8.0-10.5	
	255/70R18		113T	BL	356280	600A B		13	32.1	10.2	14.5	402	7.5	6.5-8.5	
	265/70R18		116T	BL	356310	600A B		13	32.6	10.7	14.7	395	8.0	7.0-9.0	
	235/65R18	XL	110T	BL	355900	600A B		13	30.0	9.4	13.7	430	7.0	6.5-8.5	
	265/65R18		114T	BL	356300	600A B		13	31.5	10.7	14.3	409	8.0	7.5-9.5	
	275/65R18		116T	BL	356320	600A B		13	32.1	11.0	14.5	402	8.0	7.5-9.5	
	225/60R18	XL	104T	BL	356410	600A B		13	28.6	9.0	13.1	451	6.5	6.0-8.0	
	235/60R18	XL	107T	BL	355860	600A B		13	29.1	9.4	13.3	444	7.0	6.5-8.5	
	245/60R18	XL	109T	BL	355870	600A B		13	29.6	9.8	13.5	437	7.0	7.0-8.5	
	265/60R18		110T	BL	356290	600A B		13	30.5	10.7	13.9	423	8.0	7.5-9.5	
	285/60R18	XL	120S	BL	355880	600A B		14	31.5	11.5	14.3	410	8.5	8.0-10.0	
	225/55R18	XL	102H	BL	355830	600A A		13	27.8	9.2	12.8	465	7.0	6.0-8.0	
	255/55R18	XL	109H	BL	355840	600A A		13	29.0	10.4	13.3	445	8.0	7.0-9.0	
	LT285/75R18		129/126S	BL	355710	10-E		17	34.8	11.3	15.6	370	8.0	7.5-9.5	
18	LT265/70R18		124/121Q	BL	355500	10-E		16	32.6	10.7	14.7	395	8.0	7.0-9.0	
	LT275/70R18		125/122S	BL	355510	10-E		16	33.2	11.0	14.9	389	8.0	7.0-9.0	
	LT275/70R18		125/122S	OWL	355520	10-E		16	33.4	11.0	15.0	387	8.0	7.0-9.0	
	LT295/70R18		129/126S	BL	355560	10-E		17	34.3	11.8	15.4	377	8.5	7.5-10.0	
	LT275/65R18		113/110T	BL	355390	6-C		16	32.1	11.0	14.5	402	8.0	8.0-9.5	
	LT275/65R18		113/110T	OWL	355380	6-C		16	32.3	11.0	14.6	400	8.0	8.0-9.5	
	LT275/65R18		123/120S	BL	355400	10-E		16	32.1	11.0	14.5	402	8.0	8.0-9.5	
	LT275/65R18		123/120S	OWL	355410	10-E		16	32.3	11.0	14.6	400	8.0	8.0-9.5	
	LT285/65R18		125/122S	BL	355430	10-E		17	32.6	11.5	14.7	396	8.5	8.5-10.0	
	LT305/65R18		128/125Q	BL	355450	12-F		17	33.6	12.2	15.1	385	9.0	9.0-11.0	
	LT325/65R18		127/124R	BL	355460	10-E		17	34.6	13.0	15.5	373	9.5	9.5-11.5	
	LT325/60R18		124/121S	BL	355360	10-E		17	33.3	13.0	15.0	387	9.5	9.5-11.5	
	33x12.50R18LT		122Q	BL	355930	12-F		17	32.5	12.5	14.6	397	10.0	8.5-11.0	
	35x12.50R18LT		118R	BL	356330	8-D		17	34.5	12.5	15.4	374	10.0	8.5-11.0	
	35x12.50R18LT		128Q	BL	355970	12-F		17	34.5	12.5	15.4	374	10.0	8.5-11.0	
37x12.50R18LT		128Q	BL	356010	10-E		17	36.5	12.5	16.2	354	10.0	8.0-10.5		
19	255/60R19	XL	113H	BL	356450	600A A		13	31.1	10.2	14.2	416	7.5	7.0-9.0	
	255/55R19	XL	111H	BL	356420	600A A		13	30.0	10.4	13.8	430	8.0	7.0-9.0	
	P245/60R20		107T	BL	355200	600A B		13	31.6	9.8	14.5	409	7.0	7.0-8.5	
	275/60R20		115T	BL	356340	600A B		13	33.0	11.0	15.1	391	8.0	7.5-9.5	
	255/55R20	XL	110H	BL	356430	600A A		13	31.0	10.4	14.3	416	8.0	7.0-9.0	
	275/55R20	XL	117T	BL	355850	600A B		13	31.9	11.2	14.6	405	8.5	7.5-9.5	
	P285/55R20		114T	BL	356440	600A B		14	32.4	11.7	14.8	399	9.0	8.0-10.0	
	245/50R20	XL	105H	BL	355790	600A A		13	29.7	10.0	13.8	435	7.5	7.0-8.5	
	255/50R20	XL	109T	BL	355800	600A B		13	30.1	10.4	13.9	429	8.0	7.0-9.0	
	265/50R20	XL	111T	BL	355810	600A B		13	30.5	10.9	14.1	424	8.5	7.5-9.5	
	305/50R20	XL	120T	BL	355820	600A B		14	32.0	12.4	14.7	403	9.5	8.5-11.0	
	LT275/65R20		126/123S	BL	355420	10-E		16	34.1	11.0	15.5	378	8.0	8.0-9.5	
	LT295/65R20		129/126S	BL	355440	10-E		17	35.1	11.8	15.9	368	8.5	8.5-10.5	
	LT265/60R20		121/118S	BL	355330	10-E		16	32.5	10.7	14.9	397	8.0	8.0-9.5	
	LT285/60R20		125/122R	BL	355340	10-E		17	33.5	11.5	15.2	386	8.5	8.5-10.0	
20	LT295/60R20		126/123S	BL	355350	10-E		17	33.9	11.8	15.4	380	8.5	8.5-10.5	
	LT325/60R20		126/123R	BL	355370	10-E		17	35.4	13.0	16.0	365	9.5	9.5-11.5	
	LT285/55R20		122/119T	BL	356350	10-E		17	32.4	11.7	14.8	399	9.0	8.5-10.0	
	LT295/55R20		123/120T	BL	356360	10-E		17	32.8	12.2	15.0	394	9.5	8.5-10.5	
	LT305/55R20		125/122Q	BL	355320	12-F		17	33.2	12.4	15.2	388	9.5	9.0-11.0	
	33x12.50R20LT		119Q	BL	355940	12-F		17	32.5	12.5	14.9	397	10.0	8.5-11.0	
	35x12.50R20LT		121R	BL	355980	10-E		17	34.5	12.5	15.7	374	10.0	8.5-11.0	
	35x12.50R20LT		125Q	BL	355990	12-F		17	34.5	12.5	15.7	374	10.0	8.5-11.0	
	35x13.50R20LT		126Q	BL	356040	12-F		17	34.5	13.6	15.7	374	11.0	9.5-12.0	
	37x12.50R20LT		126Q	BL	356020	10-E		17	36.5	12.5	16.5	354	10.0	8.5-11.0	
	22	285/45R22	XL	114H	BL	355780	600A A		14	32.1	11.2	14.9	402	9.5	9.0-10.5
		305/45R22	XL	118S	BL	356370	600A B		14	32.8	11.9	15.2	393	10.0	9.5-11.5
		LT285/55R22		124/121S	BL	355310	10-E		17	34.4	11.7	15.8	375	9.0	8.5-10.0
		LT295/55R22		125T	BL	356460	10-E		17	34.8	12.2	16.0	372	9.5	8.0-10.5
		LT285/50R22		121/118R	BL	355290	10-E		17	33.3	11.7	15.4	388	9.0	8.5-10.0
LT325/50R22			127Q	BL	355300	12-F		17	34.8	13.2	16.0	370	10.0	9.5-11.5	
33x12.50R22LT			109R	BL	355950	10-E		17	32.5	12.5	15.1	397	10.0	8.5-11.0	
35x12.50R22LT			121Q	BL	356000	12-F		17	34.5	12.5	15.9	374	10.0	8.5-11.0	
37x12.50R22LT			127Q	BL	356030	12-F		17	36.5	12.5	16.7	354	10.0	8.5-11.0	



OPEN COUNTRY® A/T III

On or off road all terrain light truck tire with all weather security.

The Open Country A/T III is an all-terrain tire that delivers off-road traction with responsive and predictable on-road handling. With a focus on wet performance and treadwear life, Toyo introduces advances in tread design, construction, and tread compounding.


Now light truck, SUV and van owners not only have all-terrain traction but the security of all weather traction as well, designated by the winter snowflake on the sidewall.

Features & Benefits



COMPUTER AIDED TREAD DESIGN

- >> An advanced design provides excellent off-road grip.
- >> Improved all weather traction.
- >> Provides a stylish, aggressive look.
- >> Optimized tread block arrangement delivers a quiet and comfortable ride compared to other tires in this class.



STAGGERED CENTRE BLOCK ARRANGEMENT

- >> A large contact patch adds stability and handling ability on paved roads.
- >> Increases traction during off-road conditions.



STAGGERED SHOULDER LUGS

- >> Enhances off-road traction with biting edges in mud, dirt or sand.
- >> Increase slush and deep snow traction.



LARGE LATERAL GROOVES

- >> Increases the ability to evacuate moisture and slush for added all weather traction.
- >> Reduces the chance of hydroplaning.
- >> Enhances traction on all on or off-road surfaces.




EVENLY DISTRIBUTED VOID AREA

- >> Enhances on and off-road traction.
- >> Improves tread block rigidity for added handling stability.




STONE-EJECTING BLOCKS

- >> Ejects stones from grooves to reduce the risk of stone damage.
- >> Adds biting grip in deep mud, snow, or slush.
- >> Helps stabilize the tread blocks and increases the life of the tire.



DUAL SIDEWALLS DESIGNS

- >> Two distinct sidewall designs for a choice of styles.
- >> Select sizes also available with outline white lettering (OWL).



WINTER RATING

- >> Sidewall embossed with transport Canada's winter snowflake for driving security in all weather conditions.




STURDY CONSTRUCTION

- >> Improves on road stability and handling capabilities.
- >> Increases off road durability and resistance to bruising.



3D MULTI-WAVE SIPES

- >> Increased edges for better traction on wet and slippery winter roads.
- >> Improves block rigidity for less chance of irregular wear.



ADVANCED TREAD COMPOUNDS

- >> A Silica compound added to the P/Euro metric sizes helps improve traction on wet roads.
- >> LT and flotation sizes boast an improved cut-and-chip resistance compound that helps protect the tire from the elements.
- >> Improves the wear life over its predecessor.



GREAT LOOK - READY FOR ANY TASK

Available in a wide range of sizes from P/Euro-Metric, LT-Metric and Flotation.



P/Euro-Metric
Increased Siping for Wet and Snow Performance



LT-Metric
Rugged Durability



Flotation
Larger Tread Blocks and Increased Void



Outline White Letters
Select sizes

